




Rubberific Splash Blocks

Rubberific Splash Blocks are light enough to move and sturdy enough to stay in place even during the heaviest of storms. Made from 100% recycled rubber, these splash blocks will not crack or chip during freeze and thaw cycles.

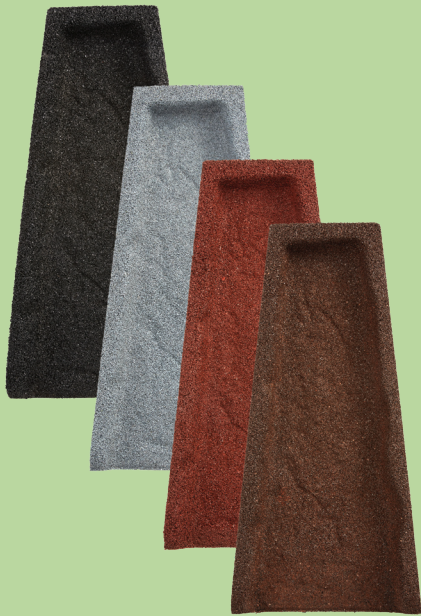

The Gold Standard of Recycled Rubber

- Compliments or matches your rubber nugget or shredded rubber mulch
- Long-lasting, durable, and functional
- Made from environmentally-friendly materials approved by the EPA
- Made in the USA
- Available in Black, Brown, Gray, and Red

Installation Instructions:

Splash blocks are installed directly beneath the downpipes. There should be one splash block per downspout. Splash blocks are designed to move water away from the foundation of the house to avoid any damage to the foundation.

If the splash block is open at one end and closed at the other, the closed off edge should be against the exterior wall or flush with the foundation. The water needs to flow away from the house rather than toward it.



While splash blocks typically have a built-in downward slope, you might need to adjust the angle of the downspout in relation to where the splash block needs to be installed, or the angle of both the splash block and the downspout.

After the splash block or splash blocks have been installed, check up on them after each rainfall for five consecutive rainfalls to see if they are working properly or need some adjustments. Periodically check the splash blocks for standing water, obstructions, shifting or misalignment, and soil erosion.

